

SPECIFICATIONS

Detection Technology: Pulse Induction with Metal Type Identifier measuring both permeability (inductance) and conductivity.

Circuitry: High reliability Surface Mount construction with environmental protective coating.

Batteries: Four C size (Two are required, and two provide a standby set).

Battery Life: Approximately 20 hours for each set of two, 40 hours total. Use alkaline batteries only.

SENSOR


Weight	240 grams, 9 oz
Size	17 inches, overall length 14 inches, shaft length 7/32 inch, shaft diameter 6 ft. coiled cable

CONTROL UNIT


Weight	500 grams, 18 oz (exec. Batteries)
Size	4.75"L x 5"W x 2.5"D

Copyright 2000, OTT Technologies LLC
Akron, Ohio U.S.A.
(330) 668-4703
www.downscope.com

Made In the U.S.A.
Patent Pending
Version 1.4

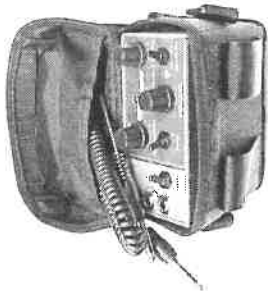

The Cordura case provides an accessory pouch with a Velcro closure. It is designed to conveniently hold the audio connecting cable that plugs into the headphone jack of your surface detector.

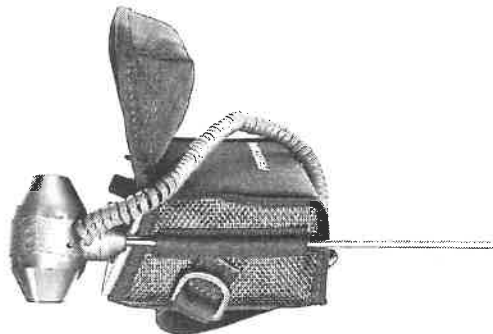

The sheath at the side of the Cordura case holds the sensor assembly while you are hunting.